


## **Continental Series**

Rope Halyard Ground Set Installation

## ESR - External Single Revolving

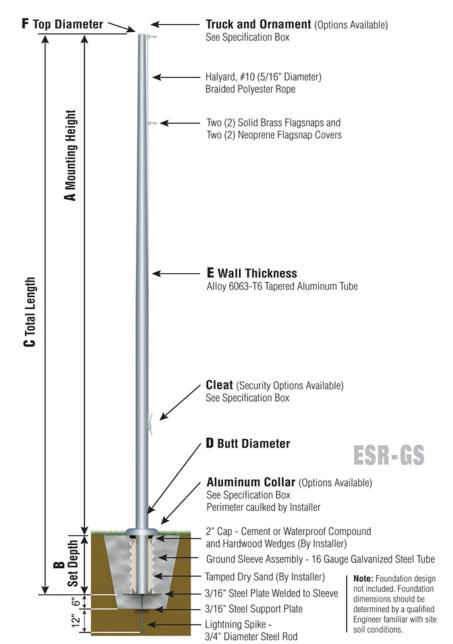

| Customer Name: |           |  |
|----------------|-----------|--|
| Dealer:        | Qty: 1    |  |
| Project:       | Location: |  |
| Notes:         |           |  |
|                |           |  |
|                |           |  |
|                |           |  |
|                |           |  |

**ESR35D51** 

SAT



TRK-9610

In-Line Truck Single Revolving



CLA-9090-SAT | 8' from bottom Cleat Only



BAL-0512-GLD-**HD Gold Anodized** Aluminum Ball



COL1-A05S

FC-11 Spun Alum 1-Piece



SAT Satin Finish

| Specifications                        |  |
|---------------------------------------|--|
| A. Mounting Height: 35'               |  |
| B. Set Depth: 3'-6"                   |  |
| C. Total Length: 38'-6"               |  |
| D. Butt Diameter: 5"                  |  |
| E. Wall Thickness: .188"              |  |
| F. Top Diameter: 3"                   |  |
| Flagpole Sections: 1                  |  |
| Shaft Weight: 137 lbs.                |  |
| Hardware Weight: 10 lbs.              |  |
| Ground Sleeve Weight: 33 lbs.         |  |
| * Max Flag Size: 6' x 10'             |  |
| * Max Wind Speed w/Nylon Flag: 79 mph |  |
| * Max Wind Speed No Flag: 95 mph      |  |
|                                       |  |
| * Wind Speed Specifications from      |  |
| ANICI/NIA ANANA ED 4004 07            |  |

ANSI/NAAMM FP 1001-07