




Sentry II Series

IRC - Internal Cam Cleat
Rope Halyard
Ground Set Installation

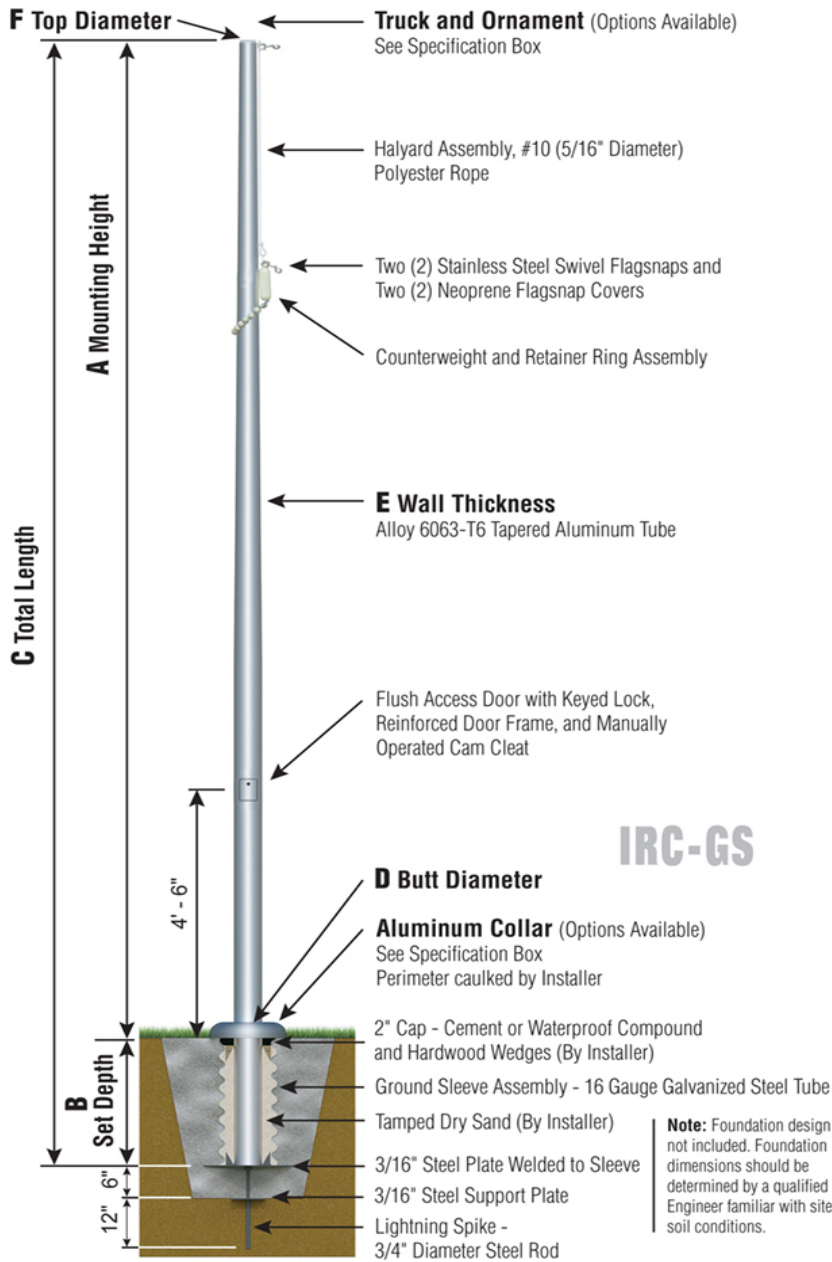

IRC40F81

- SAT




TRK-9660

Int. Revolving Truck
Sealed Bearings



BAL-0812-GLD-ES

HD Gold Anodized
Aluminum Ball



COL1-A08S

FC-11 Spun Alum
1-Piece



SAT

Satin Finish



IRC - CAM CLEAT

Reinforced Welded
Door Frame

Specifications

| |
|---|
| A. Mounting Height: 40' |
| B. Set Depth: 4'-0" |
| C. Total Length: 44'-0" |
| D. Butt Diameter: 8" |
| E. Wall Thickness: .250" |
| F. Top Diameter: 4" |
| Flagpole Sections: 1 |
| Shaft Weight: 341 lbs. |
| Hardware Weight: 20 lbs. |
| Ground Sleeve Weight: 55 lbs. |
| * Max Flag Size: 8' x 12' |
| * Max Wind Speed w/Nylon Flag: 146 mph |
| * Max Wind Speed No Flag: 205 mph |
| * Wind Speed Specifications from ANSI/NAAMM FP 1001-07 |

| | |
|----------------|-----------|
| Customer Name: | |
| Dealer: | Qty: 1 |
| Project: | Location: |
| Notes: | |

IRC40F81G-T0Y-O2P-C1S-FSA