


## **Sentry Series**

ISC - Internal Cam Cleat Rope Halyard

## Ground Set Installation

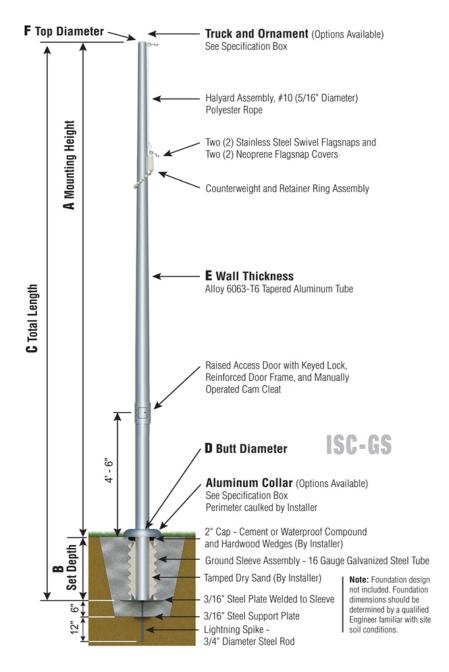

Customer Name:	
Dealer:	Qty: 1
Project:	Location:
Notes:	

ISC20B51G-T0Y-O2M-C0L-FSA

## **ISC20B51**



**TRK-9660** 

Int. Revolving Truck Sealed Bearings



SAT

BAL-0512-GLD-**ES HD Gold Anodized** 

Aluminum Ball



COL1-A05S FC-11 Spun Alum 1-Piece



SAT Satin Finish



**ISC - CAM CLEAT** Reinforced Raised Door Frame

Specifications	
A. Mounting Height: 20'	
B. Set Depth: 2'-0"	
C. Total Length: 22'-0"	
D. Butt Diameter: 5"	
E. Wall Thickness: .125"	
F. Top Diameter: 3"	
Flagpole Sections: 1	
Shaft Weight: 72 lbs.	
Hardware Weight: 17 lbs.	
Ground Sleeve Weight: 23 lbs.	
* Max Flag Size: 4' x 6'	
* Max Wind Speed w/Nylon Flag: 136 mph	
* Max Wind Speed No Flag: 229 mph	
* Wind Speed Specifications from	
ANGUNIA AMM ED 1001 07	

| ANSI/NAAMM FP 1001-07

CAFP\_010819\_1pg - 1 -