


## **Sentry Series**

ISC - Internal Cam Cleat Rope Halyard Ground Set Installation

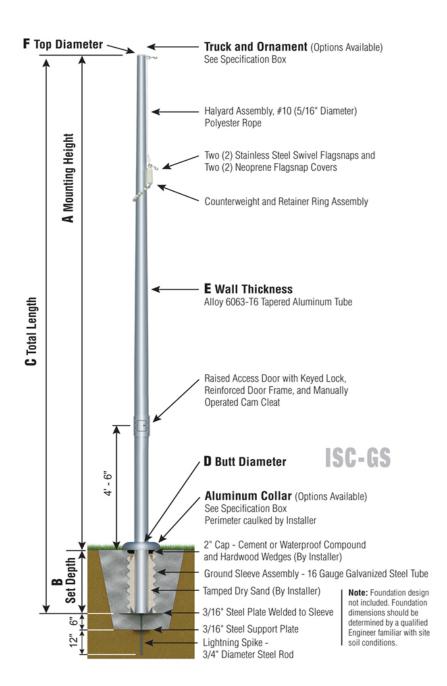

NOMINAL EXPOSED HEIGHT: Total Shaft Length of 25' flagpoles is 26'-6" with a Set Depth of 2'-6". With the Truck and Ornament attached, the nominal Mounting Height is 25'.

| Customer Name: |           |
|----------------|-----------|
| Dealer:        | Qty: 1    |
| Project:       | Location: |
| Notes:         |           |
|                |           |
|                |           |
|                |           |
|                |           |
|                |           |

ISC25C51G-T0Y-O2M-C0L-FSA

## ISC25C51



**TRK-9660** 

Int. Revolving Truck Sealed Bearings




SAT

BAL-0512-GLD-HD Gold Anodized

Aluminum Ball



COL1-A05S FC-11 Spun Alum 1-Piece



SAT Satin Finish



**ISC - CAM CLEAT** Reinforced Raised Door Frame

| Specifications                         |  |
|--|--|
| A. Mounting Height: 24'                |  |
| B. Set Depth: 2'-6"                    |  |
| C. Total Length: 26'-6"                |  |
| D. Butt Diameter: 5"                   |  |
| E. Wall Thickness: .156"               |  |
| F. Top Diameter: 3"                    |  |
| Flagpole Sections: 1                   |  |
| Shaft Weight: 105 lbs.                 |  |
| Hardware Weight: 17 lbs.               |  |
| Ground Sleeve Weight: 26 lbs.          |  |
| * Max Flag Size: 5' x 8'               |  |
| * Max Wind Speed w/Nylon Flag: 111 mph |  |
| * Max Wind Speed No Flag: 178 mph      |  |
|  |  |
| * Wind Speed Specifications from       |  |
| ANGUNIA AMM ED 1001 07                 |  |

ANSI/NAAMM FP 1001-07

CAFP\_010819\_1pg - 1 -