


Sovereignty Series

ISW - Internal with Winch Wire Halyard

Ground Set Installation

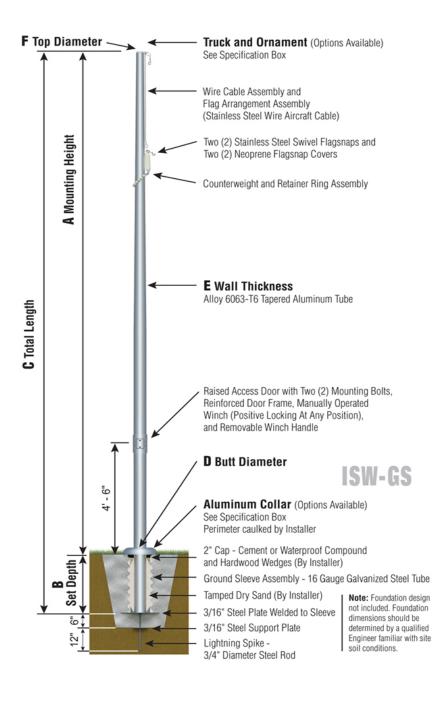

| Customer Name: | |
|----------------|-----------|
| Dealer: | Qty: 1 |
| Project: | Location: |
| Notes: | |
| | |
| | |
| | |
| | |
| | |

ISW40C72G-T0Y-O2P-C1G-FSA

ISW40C72



TRK-9660

Int. Revolving Truck Sealed Bearings



SAT

BAL-0812-GLD-**ES HD Gold Anodized**

Aluminum Ball



COL1-A07S FC-11 Spun Alum 1-Piece



SAT Satin Finish



ISW - WINCH Reinforced Raised Door Frame

| Charifications | |
|---------------------------------------|--|
| Specifications | |
| A. Mounting Height: 40' | |
| B. Set Depth: 4'-0" | |
| C. Total Length: 44'-0" | |
| D. Butt Diameter: 7" | |
| E. Wall Thickness: .156" | |
| F. Top Diameter: 3.5" | |
| Flagpole Sections: 2 | |
| Shaft Weight: 234 lbs. | |
| Hardware Weight: 32 lbs. | |
| Ground Sleeve Weight: 44 lbs. | |
| * Max Flag Size: 8' x 12' | |
| * Max Wind Speed w/Nylon Flag: 87 mph | |
| * Max Wind Speed No Flag: 122 mph | |
| | |
| * Wind Speed Specifications from | |
| ANCUMA AMM ED 1001 07 | |

ANSI/NAAMM FP 1001-07

CAFP_010819_1pg - 1 -