


## Titan Series

IWW - Internal with Winch Wire Halyard Ground Set Installation

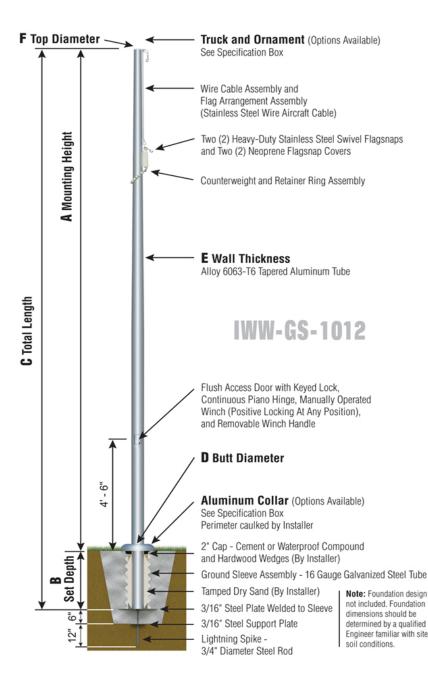

				_
IV	VW	/50	<b>D1</b>	3

## SAT



TRK-9800-58 Int. Revolving Truck Sealed Bearings



**BAL-1058-GLD** HD Gold Anodized Aluminum Ball



COL1-A10S FC-11 Spun Alum 1-Piece



IWW - WINCH Flush Mount Hinged Door

1000	100	20 Million	Contraction of the local division of the loc	
1000-010				
1000 220		- 10000000		
1000				
100-1		- 700 Million		
1000 1-0		-		
100001-000		- 2000		
1000		1000		
1000		- 20000000		
10000-00	18			
10000-1-20		100000000		
100.01		2000		
1000	- 20	- 2260		
1000 - 10		- 2000		
1000 - 100		100000		
1000 - 100				
2.1		- 26286		
1000 - 100		- 20000000		
1000	-	- 00000000		
1000				
		1000000		
1000				
1000 100		- 20000000		
1000 100	- 20	1000000		
1000		- 10000		
10000-000	18			
100 0	1.15	- 1000000		
1000		- 60000000		
1000		- 10000000		
1000 - 20				
1002 - 30	18 - I	- 10000000		
1000				
1000 . 100		-		
1000	100	Contraction in which the		
and the second s		COLUMN TO A LOCAL		
1000	100	And in case of the local division of the loc		
1000	100	- 100000		

**SAT** Satin Finish

Specifications			
A. Mounting Height: 50'			
B. Set Depth: 5'-0"			
C. Total Length: 55'-0"			
D. Butt Diameter: 10"			
E. Wall Thickness: .188"			
F. Top Diameter: 4"			
Flagpole Sections: 3			
Shaft Weight: 422 lbs.			
Hardware Weight: 52 lbs.			
Ground Sleeve Weight: 83 lbs.			
* Max Flag Size: 10' x 15'			
* Max Wind Speed w/Nylon Flag: 94 mph			
* Max Wind Speed No Flag: 136 mph			

\* Wind Speed Specifications from ANSI/NAAMM FP 1001-07

Customer Name: Dealer: Qty: 1 Project: Location: Notes:

IWW50D13G-TAZ-O0F-C2C-FSA