


Xtreme Series

XESR - Xtreme External Single Revolving Rope Halyard Ground Set Installation

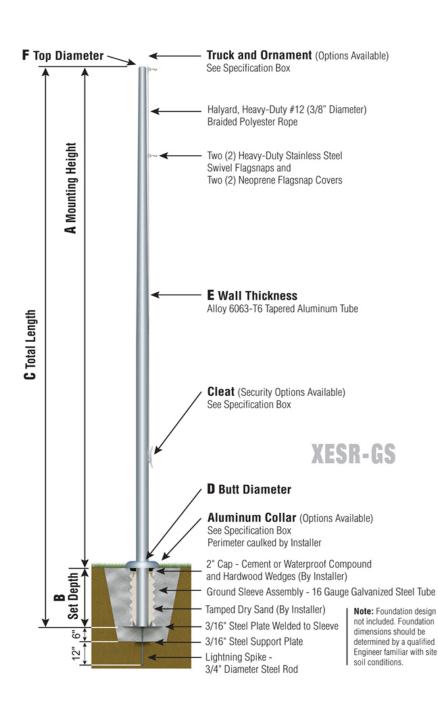

Customer Name: Dealer: Qty: 1 Project: Location: Notes:

XESR30D71

SAT



TRK-9420SS

HD Rev. Sealed Truck SS Spindle



CLA-9090-SAT | 7.5' from bottom Cleat Only



Satin Finish



BAL-0812-GLD-ES HD Gold Anodized

Aluminum Ball



COL1-A07C

FC-11 Cast Alum 1-Piece

	Specifications
A. Mou	nting Height: 30'
B. Set I	Depth: 3'-0"
C. Tota	I Length: 33'-0"
D. Butt	Diameter: 7"
E. Wall	Thickness: .188"
F. Top	Diameter: 3.5"
Flagpo	le Sections: 1
Shaft V	Veight: 193 lbs.
Hardwa	are Weight: 25 lbs.
Ground	I Sleeve Weight: 36 lbs.
* Max F	Flag Size: 6' x 10'
* Max V	Vind Speed w/Nylon Flag: 157 mph
* Max V	Vind Speed No Flag: 235 mph
	Speed Specifications from
ANSI/N	IAAMM FP 1001-07

XESR30D71G-TAU-O2P-SK-C1H-FSA