


Xtreme Series

XESR - Xtreme External Single Revolving **Rope Halyard** Ground Set Installation

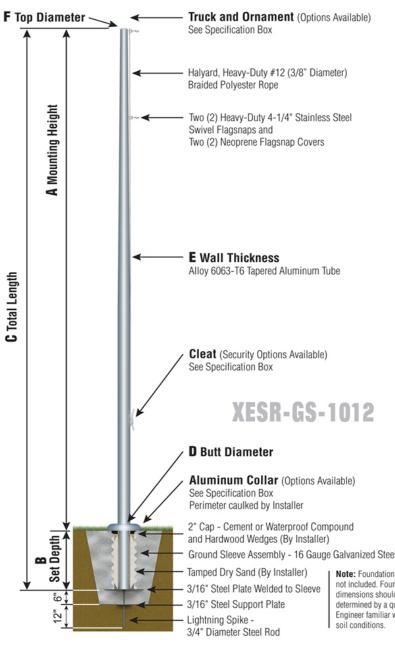

C Total Lengt	<section-header> Cleat (security Options Available) Bespecification Box DECESS-2002 DEME Diameter Muncu Collar (Options Available) Specification Box Of a Cement or Waterproof Compound Adardwood Wedges (By Installe) Specification Para Marce Lange Dry Sand (By Installe) Specification Box Cond Sleeve Assembly - 16 Gause Gavanized Steel Tote Tamped Dry Sand (By Installe) Specification Para Specification Box Cond Sleeve Assembly - 16 Gause Gavanized Steel Tote Tamped Dry Sand (By Installe) Specification Para Specification Specification</section-header>
Customer Name:	
Dealer:	Qty: 1
Project:	Location:
Notes:	
XESR45F12G-TBA-O0F-SK-C2D-I	FSA
CAFP_010819_1pg	

XESR45F12



-



TRK-9420SS-58 HD Rev. Sealed Truck SS Spindle



BAL-1058-GLD HD Gold Anodized

Aluminum Ball

COL1-A10C

1-Piece

FC-11 Cast Alum



CLA-9090-SAT | 9' from bottom Cleat Only



Specifications	
A. Mounting Height: 45'	
B. Set Depth: 4'-6"	
C. Total Length: 49'-6"	
D. Butt Diameter: 10"	
E. Wall Thickness: .250"	
F. Top Diameter: 4"	
Flagpole Sections: 2	
Shaft Weight: 449 lbs.	
Hardware Weight: 25 lbs.	
Ground Sleeve Weight: 80 lbs.	
* Max Flag Size: 8' x 12'	
* Max Wind Speed w/Nylon Flag: 168 mph	
* Max Wind Speed No Flag: 226 mph	
* Wind Speed Specifications from	
ANSI/NAAMM FP 1001-07	