


Sentry II Series IRC - Internal Cam Cleat

IRC - Internal Cam Cleat Rope Halyard Ground Set Installation

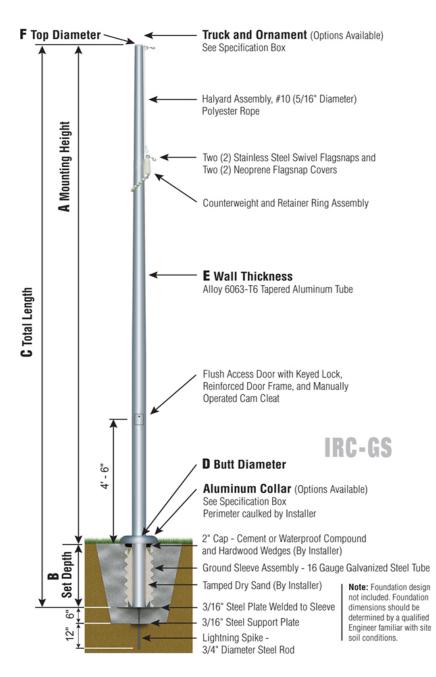

NOMINAL EXPOSED HEIGHT: Total Shaft Length of 25' flagpoles is 26'-6" with a Set Depth of 2'-6". With the Truck and Ornament attached, the nominal Mounting Height is 25'.

Customer Name:			
Dealer:		Qty: 1	
Project:	Loca	Location:	
Notes:			
IRC25D61G-T0Y-O2N-C0W-FSA			

IRC25D61

SAT



TRK-9660

Int. Revolving Truck Sealed Bearings



COL1-A06S FC-11 Spun Alum 1-Piece



IRC - CAM CLEAT Reinforced Welded Door Frame



BAL-0612-GLD-ES HD Gold Anodized Aluminum Ball



SAT Satin Finish

Specifications		
A. Mounting Height: 24'		
B. Set Depth: 2'-6"		
C. Total Length: 26'-6"		
D. Butt Diameter: 6"		
E. Wall Thickness: .188"		
F. Top Diameter: 3.5"		
Flagpole Sections: 1		
Shaft Weight: 141 lbs.		
Hardware Weight: 17 lbs.		
Ground Sleeve Weight: 32 lbs.		
* Max Flag Size: 5' x 8'		
* Max Wind Speed w/Nylon Flag: 168 mph		
* Max Wind Speed No Flag: 253 mph		
* Wind Speed Specifications from		
ANSI/NAAMM FP 1001-07		

IRC25D61G-T0Y-O2N-COW-FSA