




# Monarch Series

ICC - Internal Cam Cleat  
Rope Halyard  
Ground Set Installation

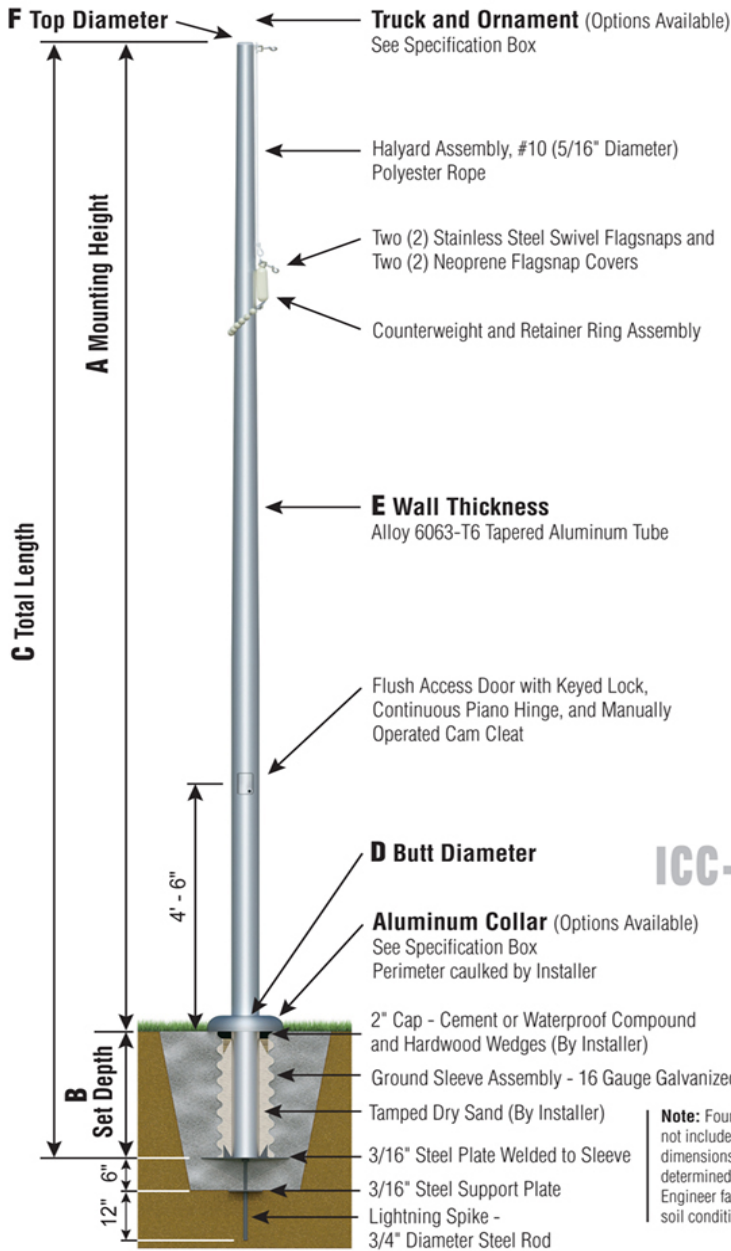

ICC-GS

**Note:** Foundation design not included. Foundation dimensions should be determined by a qualified Engineer familiar with site soil conditions.

NOMINAL EXPOSED HEIGHT: Total Shaft Length of 25' flagpoles is 26'-6" with a Set Depth of 2'-6". With the Truck and Ornament attached, the nominal Mounting Height is 25'.

Customer Name:	
Dealer:	Qty: 1
Project:	Location:
Notes:	

ICC25B51G-T0Y-O2M-C0L-FSA

ICC25B51

- SAT




TRK-9660

Int. Revolving Truck  
Sealed Bearings




BAL-0512-GLD-ES

HD Gold Anodized  
Aluminum Ball



COL1-A05S

FC-11 Spun Alum  
1-Piece



SAT

Satin Finish



ICC - CAM CLEAT

Flush Mount  
Hinged Door

Specifications
A. Mounting Height: 24'
B. Set Depth: 2'-6"
C. Total Length: 26'-6"
D. Butt Diameter: 5"
E. Wall Thickness: .125"
F. Top Diameter: 3"
Flagpole Sections: 1
Shaft Weight: 93 lbs.
Hardware Weight: 17 lbs.
Ground Sleeve Weight: 26 lbs.
* Max Flag Size: 5' x 8'
* Max Wind Speed w/Nylon Flag: 84 mph
* Max Wind Speed No Flag: 110 mph
* Wind Speed Specifications from ANSI/NAAMM FP 1001-07