



## Xtreme Series

XIWW - Xtreme Internal with Winch  
Wire Halyard  
Ground Set Installation

# XIWW25F71 - SAT



**TRK-9660SS**

Int. Rev. Sealed  
Truck  
SS Spindle




**BAL-0812-GLD-ES**

HD Gold Anodized  
Aluminum Ball




**COL1-A07C**  
FC-11 Cast Alum  
1-Piece



**SAT**  
Satin Finish



**XIWW - WINCH**  
Reinforced Welded  
Door Frame

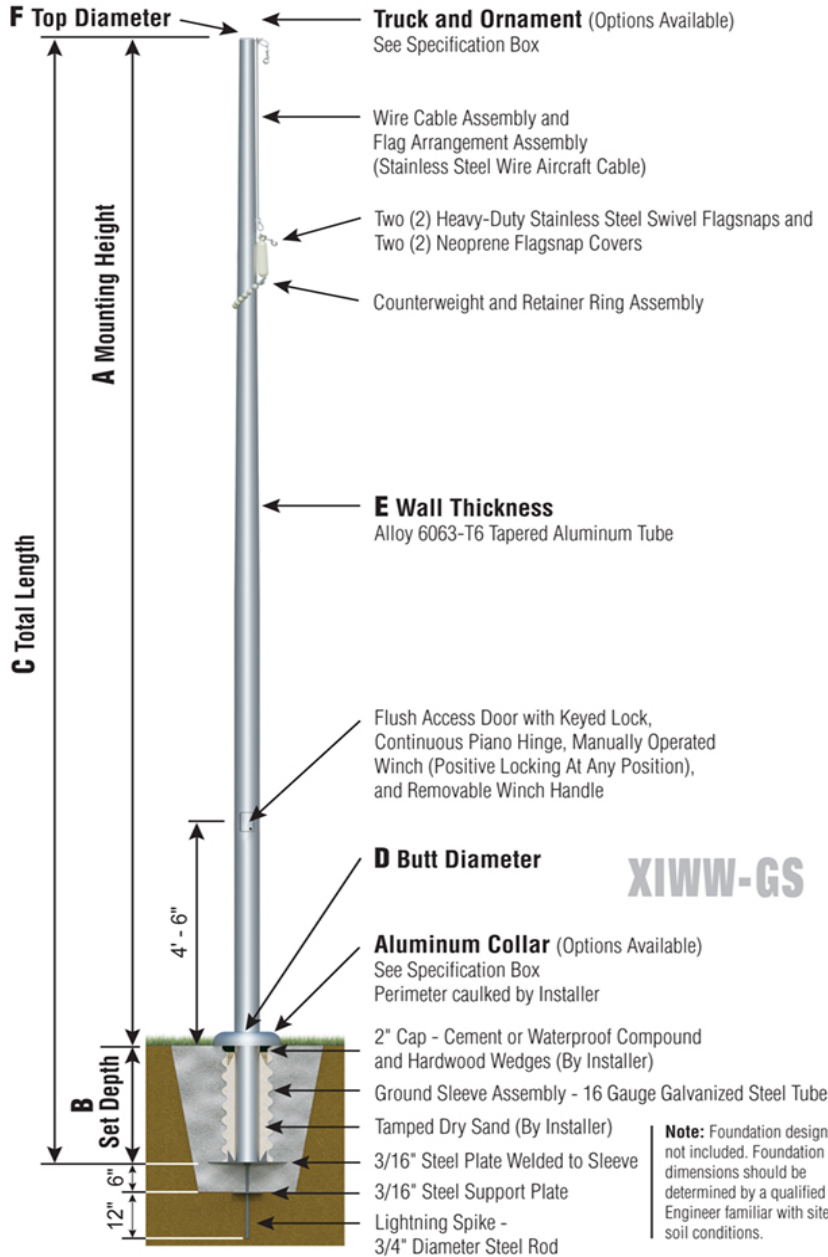

NOMINAL EXPOSED HEIGHT: Total Shaft Length of 25' flagpoles is 26'-6" with a Set Depth of 2'-6". With the Truck and Ornament attached, the nominal Mounting Height is 25'.

Customer Name:	
Dealer:	Qty: 1
Project:	Location:
Notes:	

Specifications
A. Mounting Height: 24'
B. Set Depth: 2'-6"
C. Total Length: 26'-6"
D. Butt Diameter: 7"
E. Wall Thickness: .250"
F. Top Diameter: 3.5"
Flagpole Sections: 1
Shaft Weight: 178 lbs.
Hardware Weight: 35 lbs.
Ground Sleeve Weight: 36 lbs.
* Max Flag Size: 5' x 8'
* Max Wind Speed w/Nylon Flag: 190 mph
* Max Wind Speed No Flag: 294 mph
* Wind Speed Specifications from ANSI/NAAMM FP 1001-07